





POSITIONING LINER - Lay flat or stretch on the floor. Its is recommended to erect GS III on an elevated ground/platform to prevent rodent attack.

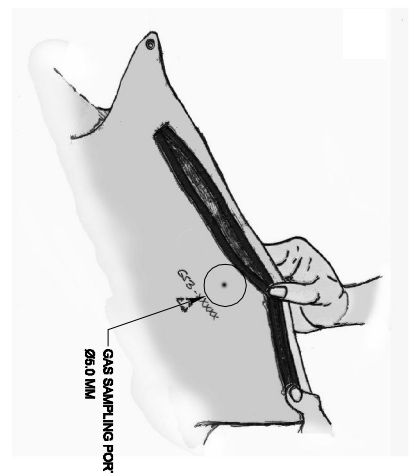


LOADING - Establish the first layer by positioning the first four bags at the corners. A fifth bag may be positioned at the center. Succeeding layers may be piled until desired height obtained.




SEALING - Press hermetic zipper against the grain to engage zipper tracks.
OXYGEN MONITORING - Oxygen concentration inside GS III can be monitored using GrainPro oxygen analyzer through the gas sampling port.

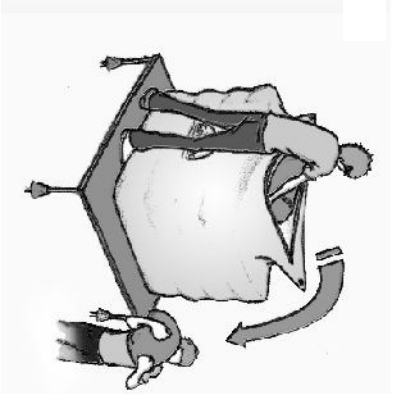


UNLOADING - Open hermetic zipper using a coin by twisting to separate tracks.

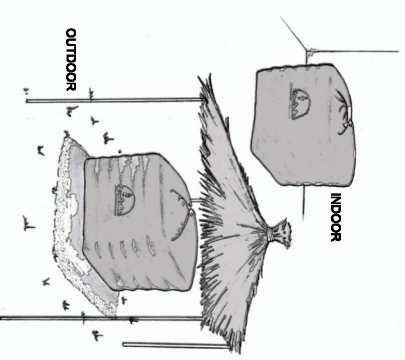


INSTALLED GS III ON GROUND - It is recommended to erect GS III on cemented pavement or inside warehouse. Otherwise provide 10cm layer (5cm fine sand + 5cm ash) leveled ground away from standing water. To minimize heating effect of the sun, for outdoor installations, provide cover/shed/installation.

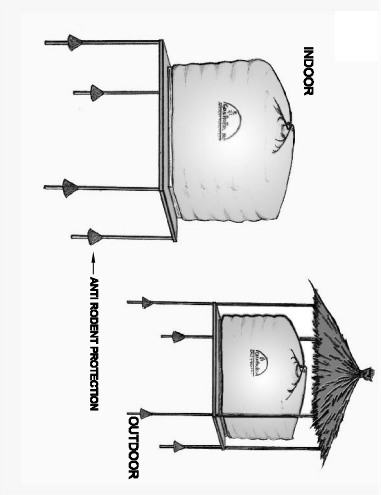

INSTALLED GS III ON A PLATFORM - As an alternative, GS III may be erected on a platform specially in areas with high rodent activity. To minimize the heating effect of the sun, for outdoor installations, provide cover/shed/insulation.

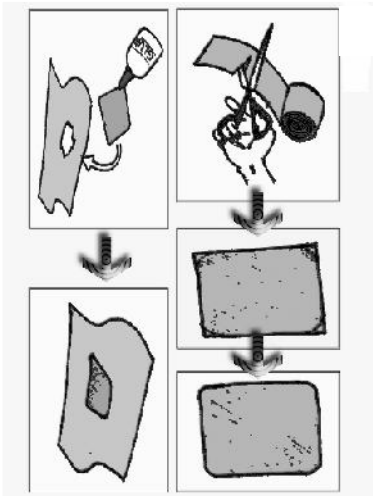

PATCHING THE LINER - Clean area to be patched with either a damp cloth or with organic solvent. Apply adhesive to the area to be patched and to the patch surface. Wait about ten minutes until adhesive has become tacky, apply patch and press into place.

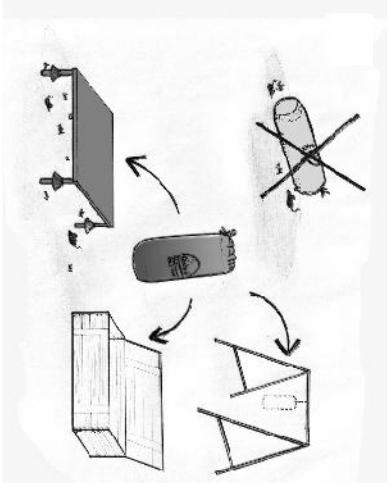

STORING GS III - Store GS-III on shelf or in box or hang above ground. Keep away from rodents.